

TRS-B C D Series SPD


SPD type 2–surge arrester, MOV
 Pluggable module, visual fault signalling

- Varistor surge arrester
- Installation to sub–distribution boards
- For protection of installations and equipments against impact of induced overvoltage during a lightning strike or switching overvoltages.


Product



Dimension

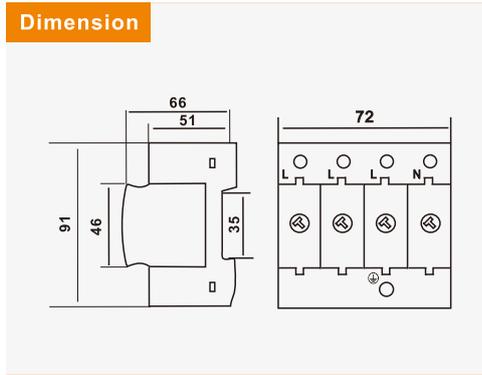

Basic circuit diagram

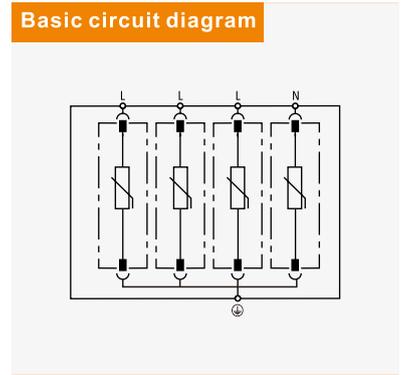

T2 AC SPD

Parameter/Type		TRS–D10	TRS–D20	TRS–C40	TRS–B60
Nominal voltage	U_n	230V AC			
Maximum operating voltage	U_c	275V AC			
Nominal discharge current (8/20 μ s)	I_n	5kA	10kA	20kA	30kA
Maximum discharge current (8/20 μ s)	I_{max}	10kA	20kA	40kA	60kA
Voltage protection level	U_p	$\leq 0,7kV$	$\leq 1,0kV$	$\leq 1,3kV$	$\leq 1,5kV$
Response time	t_a	< 25ns			
Cross–section of connected conductors solid(min/max)		16mm ² /35mm ²			
Cross–section of connected conductors stranded(min/max)		16mm ² /35mm ²			
Fault indication		red indication field			
Degree of protection		IP20			
Range of operating temperatures (min/ max)		–40°C~+70°C			
Humidity range		5%~95%			
Mounting		DIN rail 35 mm			
According to standard		EN 61643–11:2012, IEC 61643–11:2011/T2			
Remarks		Other U_c can be customized. (420VAC, 385VAC, 320VAC, etc.)			